




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04Q 7/38	A3	(11) International Publication Number: WO 99/33305 (43) International Publication Date: 1 July 1999 (01.07.99)
(21) International Application Number: PCT/SE98/02357 (22) International Filing Date: 17 December 1998 (17.12.98) (30) Priority Data: 9704863-1 23 December 1997 (23.12.97) SE (71) Applicant (for all designated States except US): TELIA AB (publ) [SE/SE]; Mårbackagatan 11, S-123 86 Farsta (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): AYOUB, Souhad [SE/SE]; Terapivägen 8 B, S-141 55 Huddinge (SE). ANDERSIN, Michael [SE/SE]; Fatburs Kvarngata 2, S-118 64 Stockholm (SE). (74) Agent: PRAGSTEN, Rolf; Telia Research AB, Vitsandsgatan 9, S-123 86 Farsta (SE).		(81) Designated States: EE, JP, LT, LV, NO, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> (88) Date of publication of the international search report: 10 September 1999 (10.09.99)

(54) Title: PROCEDURE AND SYSTEM FOR POSITION MANAGEMENT IN A MOBILE TELEPHONE SYSTEM

(57) Abstract

A device, a system and a procedure to reduce the signalling load in a cellular mobile telephone system which support packet switched services are described. One in the mobile telephone system included mobile station is switched between a first mode in a first state, here called Ready State, respective a second state, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state, in order to after that switch to the second state. The value of the time parameter is set currently depending on the current speed of the mobile station through the cell network of the mobile telephone system.

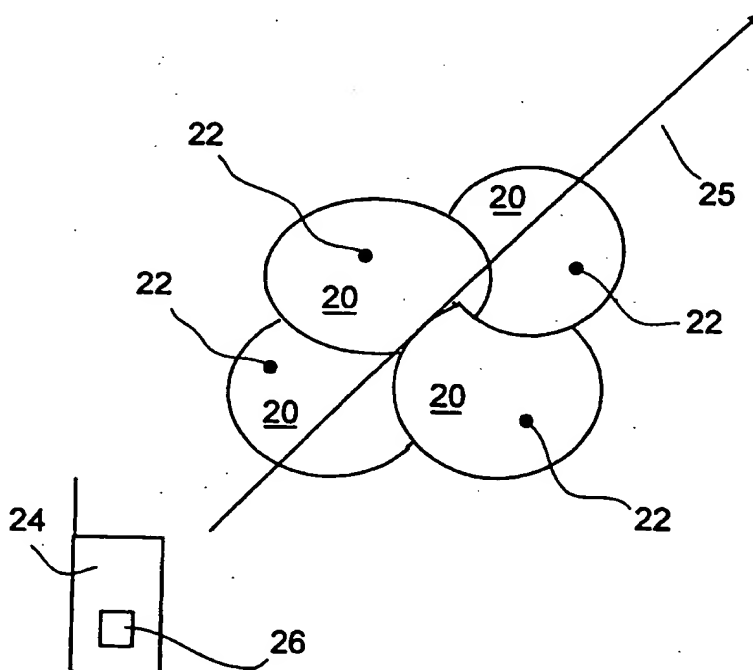

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/02357

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

INSPEC, WPI, EPODOC, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9737504 A1 (NOKIA TELECOMMUNICATIONS OY), 9 October 1997 (09.10.97), page 4, line 12 - page 5, line 33, abstract --	1-22
A	US 5745695 A (PHILIP GILCHRIST ET AL), 28 April 1998 (28.04.98), see whole document --	1-22
A	GB 2243976 A (NEC CORPORATION), 13 November 1991 (13.11.91), page 5, line 15 - page 6, line 14; page 9, line 15 - line 27 --	1,2,9,16

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 June 1999

Date of mailing of the international search report

15 -06- 1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peter Hedman/MN

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/02357

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9413114 A1 (NOKIA TELECOMMUNICATIONS OY), 9 June 1994 (09.06.94), page 2, line 11 - page 4, line 28 -----	1,2,9,16

INTERNATIONAL SEARCH REPORT
Information on patent family members

03/05/99

International application No.
PCT/SE 98/02357

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9737504	A1	09/10/97	AU	2029897 A	22/10/97
				CA	2250064 A	09/10/97
				EP	0891677 A	20/01/99
				FI	961472 A	02/10/97

US	5745695	A	28/04/98	NONE		

GB	2243976	A	13/11/91	JP	2800455 B	21/09/98
				JP	5003581 A	08/01/93
				JP	10248085 A	14/09/98
				US	5305466 A	19/04/94

WO	9413114	A1	09/06/94	AU	671511 B	29/08/96
				AU	5564294 A	22/06/94
				EP	0679321 A	02/11/95
				FI	98186 B,C	15/01/97
				FI	925447 A	31/05/94
				JP	8503588 T	16/04/96

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

H04Q 7/38

A2

(11) International Publication Number:

WO 99/33305

(43) International Publication Date:

1 July 1999 (01.07.99)

(21) International Application Number: PCT/SE98/02357

(22) International Filing Date: 17 December 1998 (17.12.98)

(30) Priority Data:

9704863-1

23 December 1997 (23.12.97)

SE

(71) Applicant (for all designated States except US): TELIA AB
(publ) [SE/SE]; Mårbackagatan 11, S-123 86 Farsta (SE).


(72) Inventors; and

(75) Inventors/Applicants (for US only): AYOUB, Souhad
[SE/SE]; Terapivägen 8 B, S-141 55 Huddinge (SE).
ANDERSIN, Michael [SE/SE]; Fatburs Kvarngata 2, S-118
64 Stockholm (SE).(74) Agent: PRAGSTEN, Rolf; Telia Research AB, Vitsandsgatan
9, S-123 86 Farsta (SE).(81) Designated States: EE, JP, LT, LV, NO, US, European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE).**Published***Without international search report and to be republished
upon receipt of that report.*

(54) Title: PROCEDURE AND SYSTEM FOR POSITION MANAGEMENT IN A MOBILE TELEPHONE SYSTEM

(57) Abstract

A device, a system and a procedure to reduce the signalling load in a cellular mobile telephone system which support packet switched services are described. One in the mobile telephone system included mobile station is switched between a first mode in a first state, here called Ready State, respective a second state, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state, in order to after that switch to the second state. The value of the time parameter is set currently depending on the current speed of the mobile station through the cell network of the mobile telephone system.

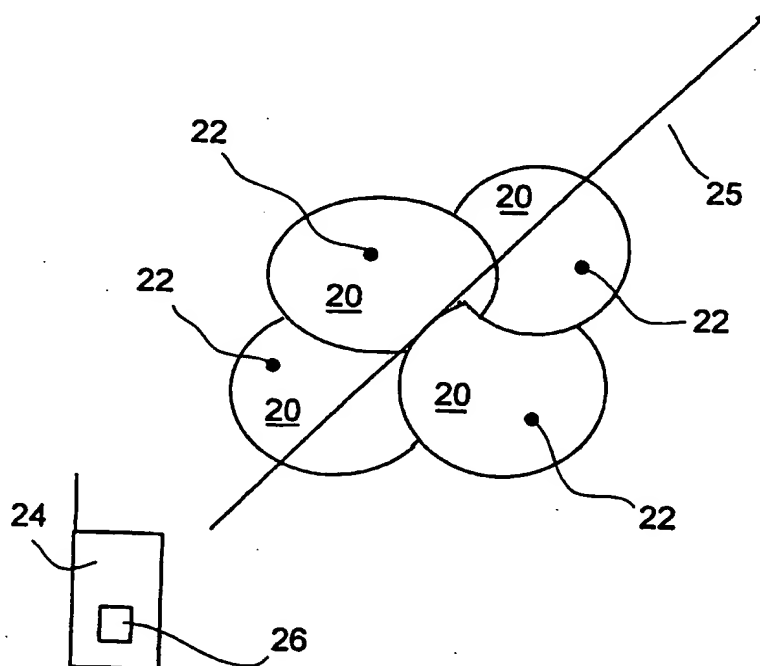

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TITLE OF THE INVENTION: PROCEDURE AND SYSTEM FOR POSITION
MANAGEMENT IN A MOBILE TELEPHONE
SYSTEM.

5 The present invention relates to a method and a system
for position management of mobile stations in a cellular
mobile telephone system.

Background of the invention

10 In order to get possibility to connect incoming calls
or transmit data to a mobile station in a cellular mobile
system, it is very important that the system can locate or
determine the position for the mobile station. The
procedure or the function to keep count of the position of
15 a mobile station within the mobile system is in the trade
called "Location Management", which in this text is called
position management. Position management requires
signalling via radio, which consequently implies that a
certain part of the total radio capacity in a cellular
20 system is needed for this type of signalling, which here
for the sake of convenience is called position signalling.
In order to make most possible share of the limited radio
capacity possible to use for voice respective data traffic,
the position management must be optimized so that it takes
25 a minimum of the available radio resource. The degree of
difficulty of the optimizing problem is increased by the
fact that the mobile stations are just, as the name
indicates, mobile.

30 In prior art the strategy for position management is
to find a suitable compromise between signalling in uplink,

i.e. from the mobile station to one in the mobile system permanent installed network of base stations, and signalling in downlink, i.e. from the network of base stations to a mobile station. Signalling in downlink is normally executed by searching, also called "paging", whereby a signalling message is transmitted from the network, to search for a mobile station in a limited area, a so called "Routing Area" (RA) which consists of one or more cells. Signalling in uplink is executed by a mobile station at intervals transmitting a message to the network, which by that can keep count of where the mobile station is at the moment. Updating of the position of the mobile station is made on one hand at change of cell, which is called "Cell Update" (CU), and on the other at change of Routing Area, which in its turn consequently is called "Routing Area Update" (RAU).

In a mobile telephone system which supports packet switched services, for instance according to the specification which in English is called General Packet Radio Service and is abbreviated GPRS, the capacity and the radio resource is utilized in a comparatively cost efficient way. This is due to the fact that a given GPRS mobile station utilizes a radio channel only when there are data that shall be transmitted or received by this mobile station. In GPRS there are specified three states of a mobile station. i.e. "Idle State", "Ready State" and "Standby State", at which there are different operations for position management at each of the different states. In the Idle State, the mobile station is not connected to the network, and the network therefore has no information about

the position of the mobile station. When the mobile station is in Ready State or in Standby State, it can, on the contrary, receive paging messages and it also can execute Routing Area Update (RAU), respective Cell Update (CU).

5 When the mobile station is in Ready State and it changes cell, a Cell Update (CU) is executed if the cells belong to the same routing area. If the new cell which the mobile station enters into also belongs to a new routing area, a Cell Update (CU) is executed combined with a Route
10 Area Update (RAU). In the Ready State there are in fact two "sub-states". Firstly "Receive/Transfer Mode", i.e. receiving/transmission mode, which is the state that usually is used at reception respective transmission of voice respective data traffic. Secondly, "Wait Mode", which
15 implies one by a time parameter limited waiting state, at which the time parameter indicates a time during which the mobile station shall remain in Ready State/Wait Mode in order to later switch to Standby State. At Standby State only Routing Area Update (RAU) is executed when the mobile
20 station changes routing area.

Prior art

The signalling load which is to be referred to the position management depends on the size of the routing
25 area, and the time which the time parameter indicates. Within known technology there has since a long time been attempts at minimizing this signalling load by means of optimization of the size of the routing area.

The aim of the invention

An aim of the invention and the overall problem to be solved is to further minimize the signalling load which depends on the position management. One in this context new
5 problem, which is an aspect of said overall problem, is to determine a time parameter which at each state of the mobile station minimizes the position management depending signalling load.

10 Summary of the invention

The invention is based on the understanding that the problem can be solved by setting the value of the time parameter in relation to the speed of a mobile through a cell network.

15 If the mobile station is stationary or is moving slowly, in the cell network, the time parameter is, according to the invention, set at a comparatively high value. This results in that the mobile station will for a longer time be in the Ready State and no paging need to be
20 executed, because the network knows exactly in which cell the mobile station is. The paging signalling, i.e., the signalling in downlink, therefore is significantly reduced. Because the mobile station is stationary, or only moving slowly, no or very low frequent Cell Updates (CU) are
25 needed, which consequently results in low signalling also in uplink.

If, on the other hand, the mobile station is moving rapidly through cell network, the time parameter is, according to the invention, set at a comparatively small
30 value. This in its turn results in that the mobile station

is in Ready State during a shorter time, and instead more rapidly changes into the Standby State. This also results in a lower number of Cell Updates (CU) and, when necessary, Routing Area Updates (RAU) are executed, which consequently results in reduced signalling in uplink.

Consequently the above mentioned problem is solved by the time parameter which controls the time during which a mobile station is in Ready State/Wait Mood being set adaptively depending on the present speed of a mobile station through a cell network.

Brief description of Figures

The invention now will be explained by means of different embodiments and with reference to enclosed figures in which:

Figure 1 illustrates a simplified state diagram for a mobile station in a GPRS-system;

Figure 2 illustrates a sketch of the principle of a cellular mobile telephone system according to the invention;

Figure 3A, 3B and 3C illustrates the principle of a base station, respective a mobile station, according to the invention.

Detailed description of embodiments

Procedure:

One embodiment of the invention consists of a procedure to reduce the signalling load in a cellular mobile telephone system which supports packet switched

services. One in the mobile telephone system included mobile station is switched between a first mode in a first state, here called Ready State, respective a second state, here called Standby State, depending on time parameter which indicates a time during which the mobile station shall remain in the first state in order to, after that, change to the second state. Figure 1 shows a simplified state diagram for such a mobile station, which can take an "Idle State", 2, a "Ready State" 4, and a "Standby State" 6. The Ready State includes 2 modes, that is "Wait Mode" 3, respective "Receive/Transfer"-mode 5. The mobile station changes at a GPRS-connection 8 from the Idle State 2, to the Ready State 4, and at a GPRS-disconnection 10 from the Ready State 4, back to the Idle State 2. The mobile station is in Ready State/Wait Mode 4/3 during an adjustable time which is controlled by said time parameter, and changes state at a change 12 to the Standby State 6 at the expiration of the set time. At transmission or at signalling about incoming voice or data traffic, the mobile station changes state in a change 14 to the Ready State 4 and Receive/Transfer Mode 5.

There also may be a time circuit for control of the duration of the Standby State 6 of the mobile station, and at the expiration of a pre-set standby time, the mobile station changes state in a change 16 to the Idle State 2.

As has been explained in the description of the background of the invention signalling are, in the different states, executed which can be related to determining of position of the mobile station. To sum up, the time parameter should, to effect a minimization of this

signalling load, have a comparatively big value when the mobile station is stationary or is moving slowly, and a comparatively small value when the mobile station is moving rapidly. According to the invention, an adaptive adjustment
5 of the time parameter is attained by the value of the time parameter being set currently, depending on the actual speed of the mobile station through the cell network of the mobile telephone system. The value of the time parameter can be set or adapted for instance regularly, irregularly
10 or in response to one in advance defined occurrence.

In a first embodiment of the procedure, the time parameter of the mobile station is given a predefined value at the entry of the mobile station into the mobile telephone system, and after that the time parameter is
15 reduced at a cell update according to a predefined rule. This rule can, for instance, be so designed that the value of the time parameter is halved at a cell update, preferably at each such cell update. If the mobile station is moved at a high speed through the cell network, a lot of
20 cell updates are executed, and by that a rapid reduction of the value of the time parameter. Consequently the time during which the mobile station is in the Ready State, and by that also the signalling load, is reduced.

In a second embodiment of the procedure, the time
25 parameter of the mobile station is, as in the first embodiment, given a predefined value at the entry of the mobile station into the mobile telephone system. The speed of the mobile station through the cell network is estimated currently, and at cell update the estimated speed
30 is reported to the network. After that, the speed of the

mobile station is adapted according to a predefined rule which may be the same rule as is used at the entry of the mobile station into the system.

The time parameter can, for instance, be set according to a table in which different time parameters for different speed intervals are described. In the case that there are corresponding time parameters at the mobile station, respective the cell network, said time parameter at the mobile station and said corresponding time parameter at the cell network are changed essentially at the same time.

Speed estimation can be performed in one in itself known way, for instance as is described in any of the publications: M.Andersin, "An Algorithm for Mobile Speed Estimation in Cellular Networks", Technical Report, 5/0363-04/FCPA 109 0001, Telia Research, January 1997; A.Sampath and J.M.Holtzman; "Estimation of Maximum Doppler Frequency for Handoff Decisions", Proceedings: IEEE 43rd Vehicular Technology Conference, VTC-93, pp.859-862, Secaucus, New Jersey, May 1993; or Ling Wang, Marko Silventoinen, Zhichun Honkasalo; "A New Algorithm For Estimating Mobile Speed at the TDMA-based Cellular System", Nokia Research Center, Heikkiläntie 7, SF-00211 Helsinki, Finland.

Mobile telephone system and mobile station:

Figure 2 illustrates the principle of a cellular mobile telephone system 18 which supports packet switched services. The system includes a network of cells 20 which are served by a base station 22 for each. One in the mobile telephone system included mobile station 24 is transferred through the cell network according to a speed vector 25.

According to what has been described above, the mobile station is switched between a first mode in a first state, here called Ready State, respective a second mode, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state in order to after that switch to the second state. A mobile telephone system and/or a mobile station according to the invention, includes means 26 to currently set the size of the time parameter or value depending on the current speed of the mobile station through the cell network of the mobile telephone system.

The in the system included means for execution of the procedure according to the invention to some extent exists in a base station 22 or in a mobile station 24. Actually there are, for most of the means, cooperating and possibly communicating devices on the one hand in the base station, and on the other in the mobile station, and how these devices are allocated, depend on the selection of implementation. For the sake of clarity are in the following figures 3A, 3B, 3C shown both a base station 22 and a mobile station 24 equipped with said means.

Figure 3A shows in principle a first embodiment of a base station 22, respective a mobile station, which includes means 28 to allocate to the time parameter of the mobile station a predefined value at the entry of the mobile station into the mobile telephone system, and means 30 to, at a cell update reduce the value of the time parameter according to a predefined rule. For instance, the value of the time parameter can be halved at a cell

update, preferably, but not necessary, at each cell update.

Figure 3B illustrates a second embodiment including means 28 for allocating the time parameter of the mobile station a predefined value at the entry of the mobile station into the mobile telephone system, means 32 to currently estimate the speed of the mobile station through the cell network, means 34 to report an estimated speed to the network at cell update, and means 36 to adapt the value of the time parameter to the speed of the mobile station according to a predefined rule.

Figure 3C illustrates a third embodiment including means 38 to report an estimated speed of the mobile station at its entry into the mobile telephone system, means 40 to set the time parameter of the mobile station according to a predefined rule depending on the speed, means 32 to currently estimate the speed of the mobile station through the cell network, and means 34 to, at cell update, report the estimated speed to the network, and means 36 to adapt the value of the time parameter to the speed of the mobile station according to a predefined rule. Possibly, but not necessarily, the means 36 and 40 can be the same.

In different embodiments the time parameter is set according to a table in which different time parameters for different time intervals are described. To the extent that said time parameter has a corresponding time parameter in the cell network, these are changed essentially at the same time.

PATENT CLAIMS

1. Procedure to reduce the signalling load in a cellular mobile telephone system which supports packet switched services, at which one in the mobile telephone system included mobile station is switched between a first mode in a first state, here called Ready State, respective a second state, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state in order to after that change to the second state, characterized in the step to currently set the value of the time parameter depending on the current speed of the mobile station through the cell network of the mobile telephone system.

2. Procedure to set a time parameter in a cellular, i.e. one of a cellular network built up, mobile telephone system which supports packet switched services, at which one in the mobile telephone system included mobile station is switched between a first mode in a first state, here called Ready State, respective a second state, here called Standby State, depending on said time parameter which indicates a time during which the mobile station shall remain in the first state in order to after that change to the second state, characterized in the step to currently set the value of the time parameter depending on the current speed of the mobile station through the cell network of the mobile telephone system.

3. Procedure according to patent claim 1 or 2,
further c h a r a c t e r i z e d in the steps to:

- at the entry of a mobile station into the mobile telephone system allocate the time parameter of the mobile station a predefined value; and to
- at a cell update reduce the time parameter according to a predefined rule.

4. Procedure according to patent claim 3,
c h a r a c t e r i z e d in that the value of the time parameter is halved at a cell update.

5. Procedure according to patent claim 1 or 2, further c h a r a c t e r i z e d in the steps to:

- at the entry of a mobile station into the mobile telephone system, allocate the time parameter of the mobile station a predefined value;
- currently estimate the speed of the mobile station through the cell network;
- at cell update report an estimated speed to the network; and to
- adapt the time parameter of the mobile station according to a predefined rule.

6. Procedure according to patent claim 1 or 2, further c h a r a c t e r i z e d in the steps to:

- at the entry of a mobile station into the mobile telephone system, report an estimated speed of the mobile station;

- set the time parameter of the mobile station according to a predefined rule depending on the speed;
- currently estimate the speed of the mobile station through the cell network;
- 5 - at cell update report the estimated speed to the network; and to
- after that adapt the speed of the mobile station according to a predefined rule.

10 7. Procedure according to patent claim 5 or 6, characterized in that the time parameter is set according to a table in which different time parameters for different speed intervals are described.

15 8. Procedure according to any of the previous patent claims, characterized in that said time parameter of the mobile station and a corresponding time parameter of the cellular network are changed essentially at the same time.

20 9. A cellular mobile telephone system (18) which supports packet switched services, at which one in the mobile telephone system included mobile station (24) is switched between a first mode in a first state, here called
25 Ready State, respective a second state, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state in order to after that change to the second state, characterized in means (26) to currently set
30 the value of the time parameter depending on the current speed of the mobile station through the cell network of the mobile telephone system.

10. Mobile telephone system according to patent claim 9, further characterized in that there are included:

- means (28) to allocate the time parameter of the mobile station a predefined value at the entry of the mobile station into the mobile telephone system; and
- means (30) to, at a cell update, reduce the value of the time parameter according to a predefined rule.

11. Mobile telephone system according to patent claim 10, characterized in that the value of the time parameter is halved at a cell update.

12. Mobile telephone system according to patent claim 9, further characterized in that there are included:

- means (28) to allocate the time parameter of the mobile station a predefined value at the entry of the mobile station into the mobile telephone system;
- means (32) to currently estimate the speed of the mobile station through the cell network;
- means (34) to report an estimated speed to the network at cell update; and
- means (36) to adapt time parameter to the speed of the mobile station according to a predefined rule.

13. Mobile telephone system according to patent claim 9, further characterized in that there are included:

- means (38) to report an estimated speed of the mobile station at its entry into the mobile telephone system;
- means (40) to set the time parameter of the mobile station according to a predefined rule depending on the speed;
- means (32) to currently estimate the speed of the mobile station through the cell network;

- means (34) to, at cell update, report the estimated speed to the network; and
- means (36) to adapt the time parameter to the speed of the mobile station according to a predefined rule.

5

14. Mobile telephone system according to patent claim 12 or 13, c h a r a c t e r i z e d in that the time parameter is set according to a table in which different time parameters for different time intervals are described.

10

15. Mobile telephone system according to any of the previous patent claims, c h a r a c t e r i z e d in that said time parameter of the mobile station and a corresponding time parameter of the cell network are

15 changed essentially at the same time.

16. A mobile station (24) included in a cellular mobile telephone system which supports packet switched services, at which the mobile station is switched between a

20 first mode in a first state, her called Ready State, respective a second state, here called Standby State, depending on a time parameter which indicates a time during which the mobile station shall remain in the first state in order to after that switch to the second state,

25 c h a r a c t e r i z e d in means (26) to currently set the value of the time parameter depending on the current speed of the mobile station through the cell network of the mobile telephone system.

30

17. Mobile station according to patent claim 16, further c h a r a c t e r i z e d in that there are included:

- means (28) to allocate the time parameter of the mobile station a predefined value at the entry of the mobile
- 35 station into the mobile telephone system; and

- means (30) to, at a cell update, reduce the time parameter according to a predefined rule.

18. Mobile station according to patent claim 17,
5 c h a r a c t e r i z e d in that the value of the time parameter is halved at a cell update.

19. Mobile station according to patent claim 16,
further c h a r a c t e r i z e d in that there are
10 included:
- means (28) to allocate the time parameter of the mobile station a predefined value at the entry of the mobile station into the mobile telephone system;
- means (32) to currently estimate the speed of the mobile
15 station through the cell network;
- means (34) to report an estimated speed to the network at cell update; and
- means (36) to adapt time parameter to the speed of the mobile station according to a predefined rule.

20

20. Mobile station according to patent claim 16,
further c h a r a c t e r i z e d in that there are
included:
- means (38) to report an estimated speed of the mobile
25 station at its entry into the mobile telephone system;
- means (40) to set the time parameter of the mobile station according to a predefined rule, depending on the speed;
- means (32) to currently estimate the speed of the
30 mobile station through the cell network;
- means (34) to, at cell update, report the estimated speed to the network; and
- means (36) to adapt the time parameter to the speed of the mobile station according to a predefined rule.

35

21. Mobile station according to patent claim 19 or 20, characterized in that the time parameter is set according to a table in which different time parameters for different speed intervals are described.

5

22. Mobile station according to any of the previous patent claims, at which said time parameter of the mobile station and a corresponding time parameter of the cell network are changed essentially at the same time.

1/3

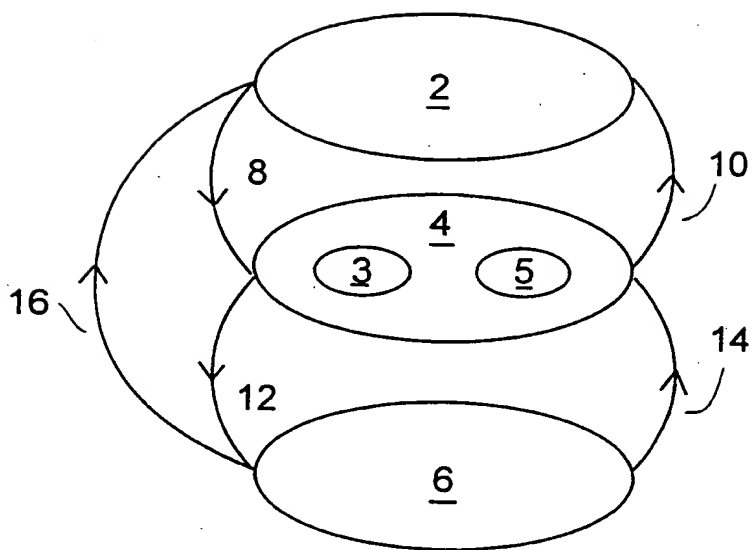


Figure 1

2/3

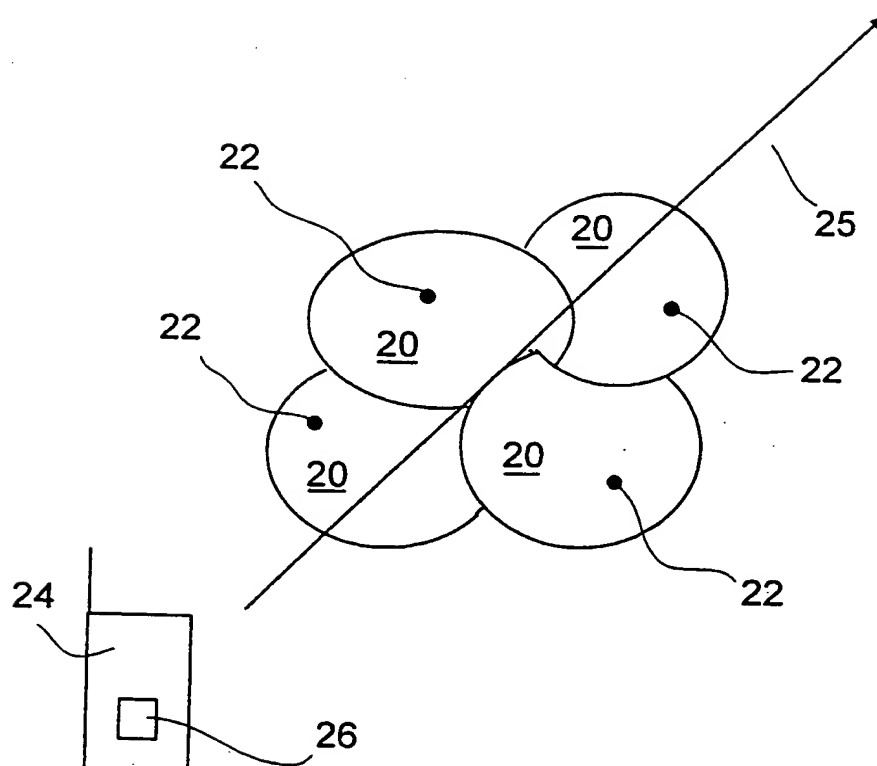


Figure 2

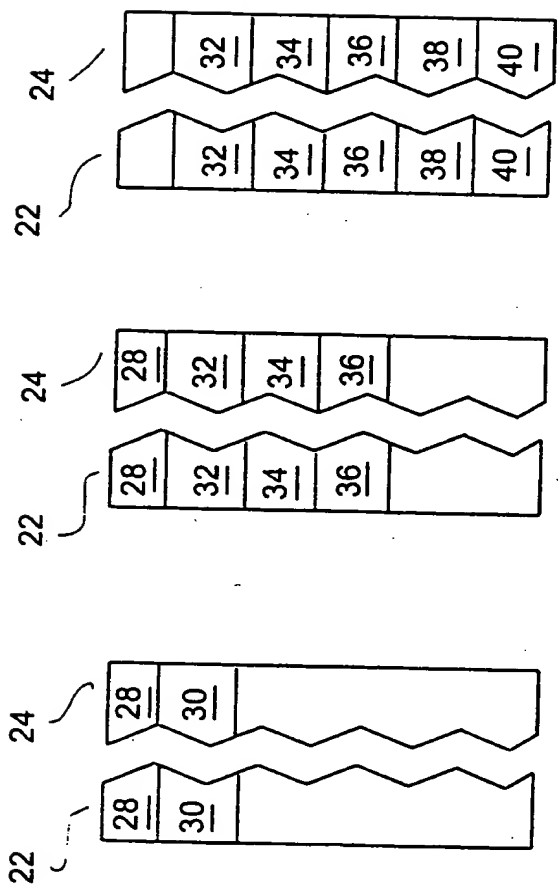


Figure 3C

Figure 3B

Figure 3A